


GK112-01



GK112-02

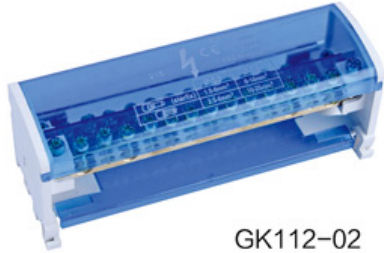

GK112-03



GK112-04



GK112-05



GK112-06

#### 材质

- PA, 尼龙 66, 防火等级: 94V-2。阻燃、抗溶性、抗冲击力好, 工作温度:  $-30^{\circ}\text{C} \sim 110^{\circ}\text{C}$ ;
- PC, 聚碳酸酯, 光泽度好、阻燃、抗冲击力及热稳定性佳、抗污染, 工作温度:  $-60^{\circ}\text{C} \sim 135^{\circ}\text{C}$ ;
- 黄铜, 螺丝铁质, 表面镀锌;
- 适用电压范围: 250V
- 颜色: 透明色 / 灰色

#### Material

- PA, Polyamide 66, 94V-2 grade. inflaming ratarnding, good resist dissolve, gooc bounce impact force, Working Temperature:  $-30^{\circ}\text{C} \sim 110^{\circ}\text{C}$  ;
- PC Polycarbonate, good glossniess, inflaming retarding, bouce impact force anc thermal stability is great, Working Temperature:  $-60^{\circ}\text{C} \sim 135^{\circ}\text{C}$  ;
- Brass, screw is Iron plated zinc;
- Voltage: 250V;
- Color: clear/ grey color.

型号 Model	规格 Spec.	安装尺寸 Installation dimension(mm)	外形尺寸 Outline dimension(mm)	横截面积 Cross Section (mm <sup>2</sup> )
GK112-01	2P-7	45 × M4	65 × 45 × 51	6.5 × 12
GK112-02	2P-15	112 × M4	132 × 45 × 51	6.5 × 12
GK112-03	4P-7	45 × M4	65 × 88 × 51	6.5 × 12
GK112-04	4P-11	80 × M4	100 × 88 × 51	6.5 × 12
GK112-05	4P-15	112 × M4	132 × 88 × 51	6.5 × 12
GK112-06	2P-11	80 × M4	100 × 45 × 51	6.5 × 12

