





RT702 RT702-B

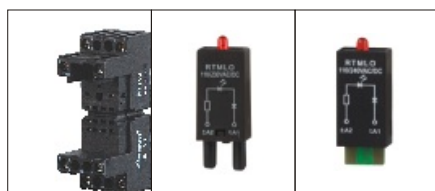

RT702-B AMB AMA





Specification

Rated load	Current / Voltage	A/VAC	10/300
Dielectric strength	Coil/Contact	V/S	4000
	Between contacts	V/S	2500
External connection wire		AWG/mm ²	20-14/0.5-2.5
Screw torque		Nm	0.8
Terminal protection degree			IP20


Matched relay

Socket model	Relay model	Metal Clip	Module	DIN clip
RT702	MY2	B-35 K-35	AMA Series	
	MY2K			
RT702-B	55.02	AMB Series		
	57.02			
	JQX-13F 2Z			


Outline dimension, Wiring diagram

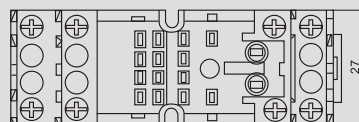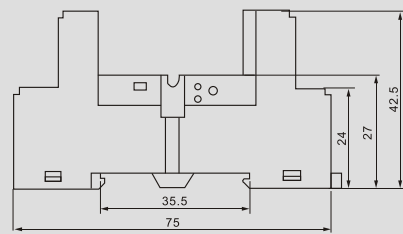


RT702-B

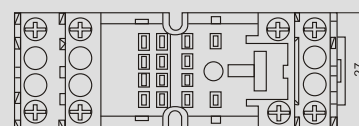


RT702



RT704-B



RT704-B AMB



Specification

Rated load	Current / Voltage	A/VAC	10/300
Dielectric strength	Coil/Contact	V/S	4000
	Between contacts	V/S	2500
External connection wire		AWG/mm ²	20-14/0.5-2.5
Screw torque		Nm	0.8
Terminal protection degree			IP20

Matched relay

Socket model	Relay model	Metal Clip	Module	DIN clip
RT704-B	MY4	B-35 K-35	AMB Series	
	MY4K			
	55.04 33.04	JQX-13F 4Z 3A		
	57.04			

Outline dimension, Wiring diagram

