

## Datasheet - AZ 17-02ZK

Safety switch with separate actuator / AZ 17



Preferred typ



- Thermoplastic enclosure
- Double-insulated
- Long life
- 30 mm x 60 mm x 30 mm
- Small body
- Multiple coding
- High level of contact reliability with low voltages and currents
- Insensitive to soiling
- 8 actuating planes
- cable gland M16


(Minor differences between the printed image and the original product may exist!)

### Ordering details

Product type description	AZ 17-02ZK
Article number	101121961
EAN code	4030661049694
eCl@ss	27-27-26-02

### Approval

Approval



### Classification

Standards	EN ISO 13849-1
B10d Normally-closed contact (NC)	2.000.000
Mission time	20 Years
notice	$MTTF_d = \frac{B_{10d}}{0,1 \times n_{op}}$ $n_{op} = \frac{d_{op} \times h_{op} \times 3600 \text{ s/h}}{t_{cycle}}$

## Global Properties

---

Product name	AZ 17
Standards	EN 60947-5-1, BG-GS-ET-15
Materials	
- Material of the housings	Plastic, glass-fibre reinforced thermoplastic, self-extinguishing
- Material of the contacts	Silver
Housing coating	None
Weight	85 g

## Mechanical data

---

Design of electrical connection	IDC method of termination
Cable section	
- Min. Cable section	1 x 0,75 mm <sup>2</sup>
- Max. Cable section	1 x 1 mm <sup>2</sup>
Mechanical life	> 1.000.000 operations
higher Latching force (Y/N)	No
Latching force	5 N
Positive break force	17 N
positive break travel	11 mm
Max. Actuating speed	2 m/s

## Ambient conditions

---

Protection class	IP67 to IEC/EN 60529
------------------	----------------------

## Electrical data

---

Design of control element	Opener (NC)
Switching principle	Creep circuit element
Number of auxiliary contacts	0 piece
Number of safety contacts	2 piece
Rated impulse withstand voltage $U_{imp}$	4 kV
Rated insulation voltage $U_i$	250 V
Thermal test current $I_{the}$	10 A
Utilisation category	AC-15: 230 V / 4 A DC-13: 24 V / 4 A
Max. fuse rating	6 A gG D-fuse

## ATEX

---

Explosion protection categories for gases	None
Explosion protected category for dusts	None

## Dimensions

---

Dimensions of the sensor	
- Width of sensor	30 mm
- Height of sensor	85 mm
- Length of sensor	30 mm

## notice

---

Individual coding available on request

This type termination (IDC) method enables simple connection of flexible conductors without the need for the use of conductor ferrules

### Included in delivery


---

Actuators must be ordered separately.






Slot sealing plugs

### Diagram

---




Note Diagram






-  positive break NC contact
-  active
-  no active
-  Normally-open contact
-  Normally-closed contact
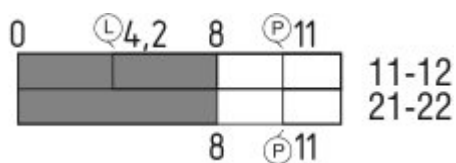
### Switch travel diagram

---



Notes Switch travel diagram

-  Contact closed
  -  Contact open
  -  Setting range
  -  Break point
  -  Positive opening sequence/- angle
- VS** adjustable range of NO contact  
**VÖ** adjustable range of NC contact  
**N** after travel

### Documents

---

**Operating instructions and Declaration of conformity (pl)** 522 kB, 04.07.2016

Code: mrl\_az17\_pl

**Operating instructions and Declaration of conformity (ro)** 511 kB, 25.01.2012

Code: mrl\_az17\_ro

**Operating instructions and Declaration of conformity (sv)** 491 kB, 07.08.2015

Code: mrl\_az17\_sv

**Operating instructions and Declaration of conformity (jp)** 746 kB, 20.01.2017

Code: mrl\_az17\_jp

**Operating instructions and Declaration of conformity (it)** 490 kB, 04.07.2016

Code: mrl\_az17\_it

**Operating instructions and Declaration of conformity** (da) 510 kB, 25.01.2012

Code: mrl\_az17\_da

**Operating instructions and Declaration of conformity** (es) 492 kB, 22.06.2016

Code: mrl\_az17\_es

**Operating instructions and Declaration of conformity** (de) 536 kB, 07.06.2016

Code: mrl\_az17\_de

**Operating instructions and Declaration of conformity** (en) 535 kB, 07.06.2016

Code: mrl\_az17\_en

**Operating instructions and Declaration of conformity** (fr) 491 kB, 29.04.2016

Code: mrl\_az17\_fr

**Operating instructions and Declaration of conformity** (nl) 493 kB, 04.07.2016

Code: mrl\_az17\_nl

**Operating instructions and Declaration of conformity** (pt) 540 kB, 04.07.2016

Code: mrl\_az17\_pt

**Operating instructions and Declaration of conformity** (cs) 520 kB, 06.04.2016

Code: mrl\_az17\_cs

**BG-test certificate** (en) 159 kB, 26.11.2015

Code: z\_z17p02

**BG-test certificate** (de) 181 kB, 26.11.2015

Code: z\_z17p01

**CCC certification** (cn) 3 MB, 29.08.2017

Code: q\_175p03

**CCC certification** (en) 3 MB, 29.08.2017


Code: q\_175p02

**EAC certification** (ru) 844 kB, 05.10.2015

Code: q\_6037p17\_ru

## Images

---

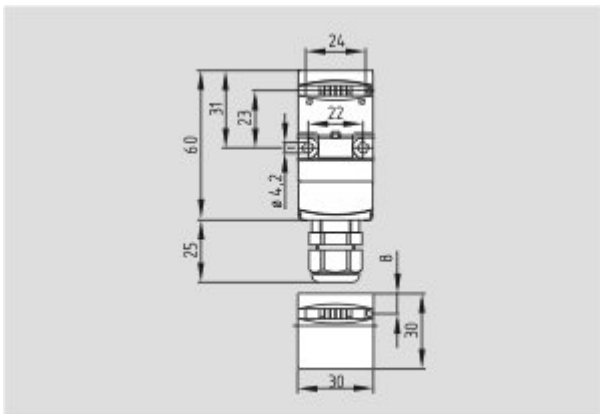

Dimensional drawing (basic component)

---

K.A. Schmersal GmbH & Co. KG, Möddinghofe 30, D-42279 Wuppertal

The data and values have been checked thoroughly. Technical modifications and errors excepted.

Generiert am 30.10.2017 - 12:39:19h Kasbase 3.2.7.F.64l