

Order Code:

P1EC304ECS30

Contact Block:

1 NO – 1 NC – LED 12-30V AC-DC


Terminals with finger protection.

Fireproof plastic contact block body.

Sequential connectable body and contact blocks after lego magic.

Protective cable inlet tips enabling maximum safety.

Screw Washers.

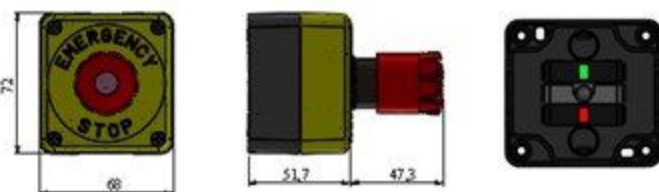

Technical Information :

Body:

Plastic housing.

Opportunity of positioning with plates and Badge Bases.

Standards:

- TS EN 60947 -5-1

General Specifications

Operating Temperature	-5/+85°C
Mechanical life	0,5 Million (3000 open-close/hour)
Electrical Life	0,1 Million (1800 open-close/hour)
C.Block Tightening Torque	0,6-0,8 Nm
C.Block Connection Wire Profile	Min: 1x0,5 mm'2
Wire Profile	Max: 2x2,5 mm'2

In Contact Blocks;

- VDE 0660



Electrical Informations :

General Specifications

Range Of Use		AC15
Operating Voltage	Ue	12-30V AC-DC
Freguency	F	50Hz
Operating Current	Ie	4A
Insulation Resistance	Ui	300V
Stroke Resistance Voltage	Uimp	2.5kV
Dielectrical Strength		1500V AC