


Z-15G Micro Switch 微动开关



接触形式 Contact Type

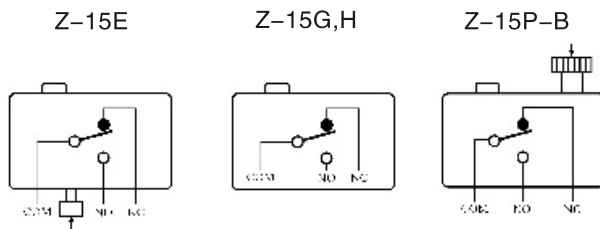


| 型号 mode | Z-15HW52-B | | Z-15HW78-B | | Z-15HW24-B | | Z-15P-B | | Z-15P-B | |
|---------------------------------|------------|----------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--|
| 动作特性 operation speciality | Z-15HW52-B | | Z-15HW78-B | | Z-15HW24-B | | Z-15P-B | | Z-15P-B | |
| OF 最大(max) | 6g | 4g | 6g | 200g | 570g | 200g | 570g | 200g | 570g | |
| RF 最小(min) | 0.5g | 0.3g | 0.5g | 114g | 114g | 114g | 114g | 114g | 114g | |
| PT 最大(max) | 8.3g | 10mm | 19.8mm | 0.3g | 0.7g | 0.3g | 0.7g | 0.3g | 0.7g | |
| OT 最小(min) | 5.6mm | 6mm | 10mm | 0.14mm | 0.14mm | 1.6mm | 1.6mm | 1.6mm | 1.6mm | |
| MD 最大(max) | 0.65mm | 3mm | 2mm | 0.025mm | 0.07mm | 0.025mm | 0.07mm | 0.025mm | 0.07mm | |
| OP | 19 ± 1mm | 20 ± 1mm | 19.8 ± 1.6mm | 15.9 ± 0.6mm | 28.2 ± 0.6mm | 15.9 ± 0.6mm | 28.2 ± 0.6mm | 15.9 ± 0.6mm | 28.2 ± 0.6mm | |

| | |
|---------------------------------------|--|
| 操作速度 operation speed | 0.01mm to 1m/swc |
| 工作频率 operation frequency | 机械的mechanical: 240次/分(times/m) 电气的electrical: 20次/分(times/m) |
| 绝缘电阻 insulation resistance | 100MΩ at 500VDC |
| 接触电阻 contact resistance | 20mΩ 以下初始initial |
| 耐电压 voltage withstand | 非串联端子间1,000VAC 持续1分钟 1,000VAC, 50/60Hz for 1 minute between non-continuous terminal 端子间和地间2,000VAC持续1分钟 2,000VAC, 50/60Hz for 1 minute between current-carrying part and ground |
| 振动vibration | 机械承受力: Mechanical durability 双震幅: 10 to 55Hz 1.5mm double amplitude 1.5mm |
| 环境温度 ambient operating temperature | 普通: general purpose type -25° to +80° |
| 湿度humidity | 普通: general purpose type 85% RH max |
| 工作寿命service life | 机械: Mechanically 20,000,000 operations min 电气: Electrically 500,000 operations min |

| 额定电压 rated voltage (V) | 电阻负载 Noninductive load(A) | | | | 电感负载 Inductive load(A) | | | | Inrush current (A) | |
|------------------------------|------------------------------|----|-----------------|----|---------------------------|------|-------------------|----|-----------------------|--|
| | 电阻 Resistive load | | 电感 Inductive | | 电动机 Motor load | | | | | |
| | NC | NO | NC | NO | NC | NO | NC | NO | | |
| 125 VAC | 15 | | 15 | | 5 | 2.5 | 30 最大 (max) | | 15 最大 (max) | |
| 250 VAC | 15 | | 15 | | 3 | 1.5 | | | | |
| 500 VAC | 3 | | 2.50 | | 1.5 | 0.75 | | | | |
| 8 VAC | 15 | | 15 | | 5 | 2.5 | 30 最大 (max) | | 15 最大 (max) | |
| 14 VAC | 15 | | 10 | | 5 | 2.5 | | | | |
| 30 VAC | 6(2) | | 5 | | 5 | 2.5 | | | | |
| 125 VAC | 0.4 | | 0.05 | | 0.05 | 0.05 | | | | |
| 250 VAC | 0.2 | | 0.03 | | 0.03 | 0.03 | | | | |

| 型号 mode | Z-15G-B | Z-15GL-B | Z-15GL2-B | Z-15GS-B | Z-15GD-B | Z-15GQ-B | Z-15GQ22-B | Z-15GQ21-B | Z-15GQ8-B |
|------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|------------|
| OF 最大(max) | 350g | 150g | 150g | 350g | 350g | 350g | 350g | 350g | 250~350g |
| RF 最小(min) | 114g | 14g | 14g | 114g | 114g | 114g | 114g | 114g | 114g |
| PT 最大(max) | 0.4mm | 4mm | 4mm | 0.4mm | 0.4mm | 0.4mm | 0.4mm | 0.4mm | 0.5mm |
| OT 最小(min) | 0.13mm | 1.6mm | 1.6mm | 1.6mm | 1.6mm | 5.5mm | 3.58mm | 3.58mm | 5.5mm |
| MD 最大(max) | 0.05mm | 1.3mm | 1.3mm | 0.05mm | 0.05mm | 0.05mm | 0.05mm | 0.05mm | 0.05mm |
| FP 最大(max) | - | 20.6mm | 31.8mm | - | - | - | - | - | - |
| OP | 15.9 ± 0.4mm | 17.4 ± 0.8mm | 28.6 ± 0.8mm | 28.2 ± 0.6mm | 21.6 ± 0.5mm | 21.8 ± 0.8mm | 33.4 ± 1.2mm | 33.4 ± 1.2mm | 32.5 ± 1mm |

Z/A/X 系列接线盒护罩

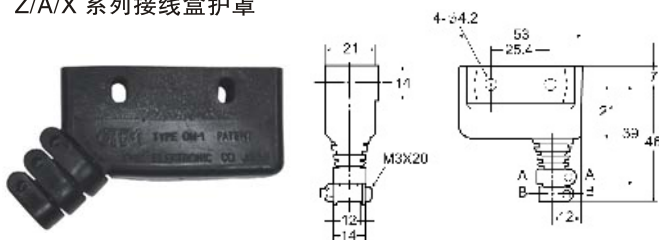

Z-15P-B

