


**SlimFix  
SF 2/12 MC NE GE V2**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

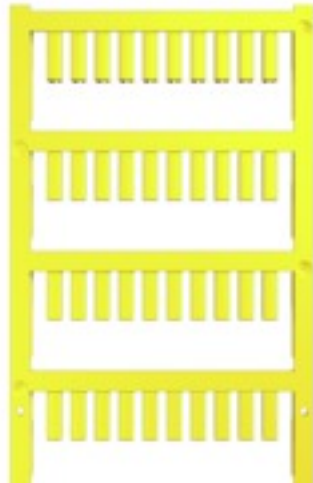

SlimFix are conductor and cable markers with a space-saving design. The markers can be fitted even after the conductor has been installed. They consist of halogen-free material and comply with flammability rating V0/V2. SlimFix is an acknowledged and accredited marker type for traffic engineering applications. The SF tool allows easy installation, even in case of small markers.

- Halogen-free material
- Flammability rating V0/V2
- Approved and accredited markers for traffic engineering applications, etc.
- Has to be fixed with cable ties if the conductor cross-section is larger than 16.0 mm<sup>2</sup>
- Markers in proven MultiCard format

**General ordering data**

Type	SF 2/12 MC NE GE V2
Order No.	<a href="#">1919470000</a>
Version	SlimFix, Conductor and cable markers, 2.2 - 2.9 mm, 12 x 3.6 mm, Yellow
GTIN (EAN)	4032248555765
Qty.	400 pc(s).
compatible printer	<a href="#">1324380000</a>

## SlimFix SF 2/12 MC NE GE V2

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

## Technical data

### Dimensions and weights

Width	3.6 mm	Width (inches)	0.142 inch
Height	12 mm	Height (inches)	0.472 inch
Depth	3.65 mm	Depth (inches)	0.144 inch
Net weight	0.25 g		

### General data

Colour	Yellow	Material	Polyamide 66
Material colour according to resistance code	4	Operating temperature range	-40...100 °C
Recommended industries	Transportation, Machinery	Size of labelling field	12x3.6 mm
Type of printing	blank	UL 94 flammability rating	V-2
Width	3.6 mm		

### Conductor and cable markers

Conductor O.D.	2.2 - 2.9 mm	Conductor O.D., max.	2.9 mm
Conductor O.D., min.	2.2 mm	Conductor cross-section, max.	1.5 mm <sup>2</sup>
Conductor cross-section, min.	0.75 mm <sup>2</sup>	Halogen	No

### Classifications

ETIM 3.0	EC001530	ETIM 4.0	EC001530
ETIM 5.0	EC001530	ETIM 6.0	EC001530
UNSPSC	44-12-17-08	eClass 5.1	27-14-91-03
eClass 6.2	27-40-04-01	eClass 7.1	27-14-91-03
eClass 8.1	27-14-91-03	eClass 9.0	27-14-07-08
eClass 9.1	27-40-04-01		

### Approvals

ROHS	Conform
------	---------

### Downloads

Engineering Data	<a href="#">EPLAN, WSCAD, Zuken E3.S</a>
Software	<a href="#">M-Print PRO configuration file</a>

**Data sheet**

**SlimFix**  
**SF 2/12 MC NE GE V2**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 16  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
[www.weidmueller.com](http://www.weidmueller.com)

**Drawings**

