


W-Series
WDK 2.5 LD RT 24VDC -+

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

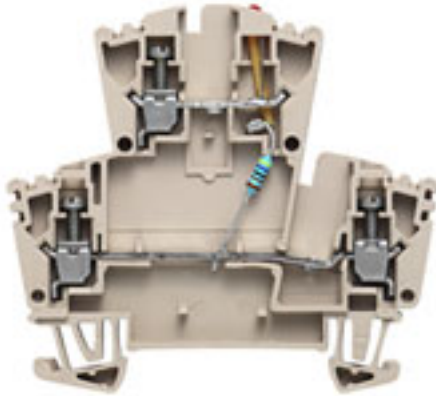

Klippon® Connect with clamping yoke Technology

The high reliability and variety of designs of the terminal blocks with clamping yoke connections make planning easier and optimises operational safety. Klippon® Connect provides a proven response to a range of different requirements.

General ordering data

Type	WDK 2.5 LD RT 24VDC -+
Order No.	8023630000
Version	W-Series, Feed-through terminal, Double-tier terminal, Rated cross-section: 2.5 mm ² , Screw connection
GTIN (EAN)	4008190298524
Qty.	25 pc(s).

W-Series
WDK 2.5 LD RT 24VDC -+

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data**Dimensions and weights**

Width	5.1 mm	Width (inches)	0.201 inch
Height	69 mm	Height (inches)	2.717 inch
Depth	62.5 mm	Depth (inches)	2.461 inch
Depth including DIN rail	63 mm	Net weight	11.11 g

Temperatures

Continuous operating temp., min.	-50 °C	Continuous operating temp., max.	120 °C
----------------------------------	--------	----------------------------------	--------

Material data

Material	Wemid	Colour	Dark Beige
UL 94 flammability rating	V-0		

System specifications

Version	Screw connection, with LED	Tightening torque (clamping screw for copper conductors)	0.4...0.6 Nm
End cover plate required	Yes	Number of potentials	1
Number of levels	2	No. of clamping points per level	2
Number of potentials per tier	1	Levels cross-connected internally	Yes
PE connection	No	Mounting rail	TS 35
N-function	No	PE function	No
PEN function	No		

Additional technical data

Electronic component	red LED	Explosion-tested version	No
Number of similar terminals	1	Open sides	right
Type of mounting	Snap-on		

Conductors for clamping (rated connection)

Blade size	0.6 x 3.5 mm	Clamping range, rated connection, max.	4 mm ²
Clamping range, rated connection, min.	0.13 mm ²	Connection direction	on side
Gauge to IEC 60947-1	A3	Number of connections	3
Stripping length	10 mm	Tightening torque, max.	0.6 Nm
Tightening torque, min.	0.4 Nm	Type of connection	Screw connection
Wire connection cross section, finely stranded with wire-end ferrules DIN 46228/1, rated connection, max.	2.5 mm ²	Wire connection cross section, finely stranded with wire-end ferrules DIN 46228/1, rated connection, min.	0.5 mm ²
Wire connection cross section, finely stranded, max.	4 mm ²	Wire connection cross section, solid core max. rated connection	4 mm ²
Wire connection cross section, solid core, min. rated connection	0.5 mm ²	Wire connection cross section, stranded, rated connection, max.	4 mm ²
Wire connection cross section, stranded, rated connection, min.	1.5 mm ²	Wire connection cross-section, finely stranded, min.	0.5 mm ²

Dimensions

TS 35 offset	35.5 mm
--------------	---------

W-Series
WDK 2.5 LD RT 24VDC -+

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data**Display element**

Current	5 mA	Indicator element	red
Operating voltage for display, max.	24 V	Operating voltage for display, min.	24 V
Type of voltage for indicator	DC		

Rating data

Rated cross-section	2.5 mm ²	Rated voltage	24 V
Current at maximum wires	10 A	Standards	IEC 60947-7-1
Volume resistance according to IEC 60947-7-x	1.33 mΩ	Rated impulse withstand voltage	0.8 kV
Pollution severity	3		

Classifications

ETIM 3.0	EC000898	ETIM 4.0	EC000903
ETIM 5.0	EC000903	ETIM 6.0	EC000897
UNSPSC	30-21-18-11	eClass 5.1	27-14-11-27
eClass 6.2	27-14-11-27	eClass 7.1	27-14-11-27
eClass 8.1	27-14-11-27	eClass 9.0	27-14-11-27
eClass 9.1	27-14-11-20		

Product information

Descriptive text ordering data	2.5 mm ² conductor with ferrule with plastic collar, with collar optimised for diameter only (order No. 1333100000, QTY 500).
Descriptive text accessories	Cross-connections, see section "W series accessories".

Approvals

Approvals



ROHS Conform

Downloads

Approval/Certificate/Document of Conformity	DE_PT1081_20160418_671_ISSUE01.pdf
Brochure/Catalogue	CAT 1 TERM 16/17 EN
Engineering Data	EPLAN, WSCAD, Zuken E3.S

Safety noteSafety notice [Safety Information](#)

Data sheet

W-Series
WDK 2.5 LD RT 24VDC -+

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Drawings

