





LV 9000, LV 9500


Snap-Locking Waterproof Connectors Pre-Filled with Silicone

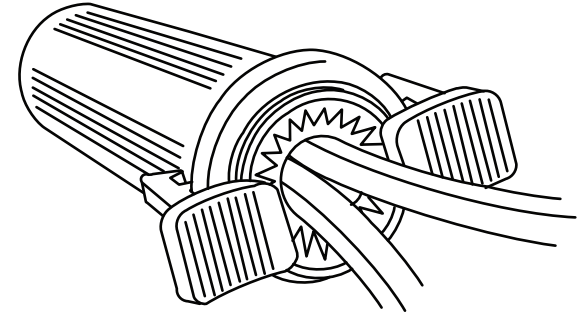

LV 9000 24 to 18 AWG - Yellow
 Minimum 2 #24 AWG - Maximum 5 #18 AWG

1.1550in, 29.34mm wide (handles)
 .772 in, 19.55mm wide (cylinder top)
 1.849 in, 46.96mm (at tallest including handles)


- Sealant temperature - -40° F to 400° F
- Copper and/or aluminum wires, solid or stranded
- For low-voltage connections only - Maximum 30 Volts




LV 9500 18 to 10 AWG - Black
 Minimum 2 #18 AWG - Maximum 3 #10 AWG with 1 #18 AWG

1.480in, 37.64mm wide (handles)
 1.157 in, 29.63 mm wide (cylinder top)
 2.270 in, 57.68mm (at tallest including handles)


- Sealant temperature - -40° F to 400° F
- Copper and/or aluminum wires, solid or stranded
- For low-voltage connections only - Maximum 30 Volts

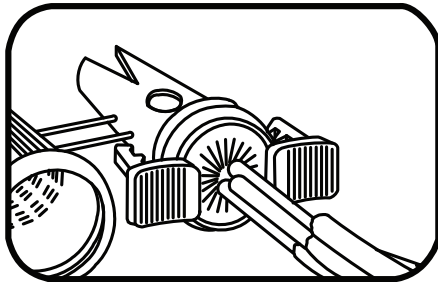


1. Insert

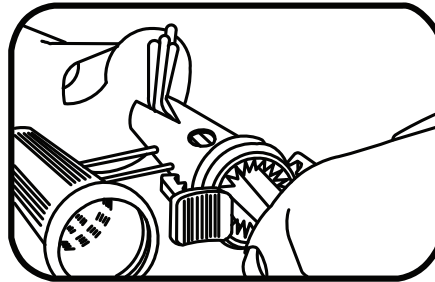



2. Bend

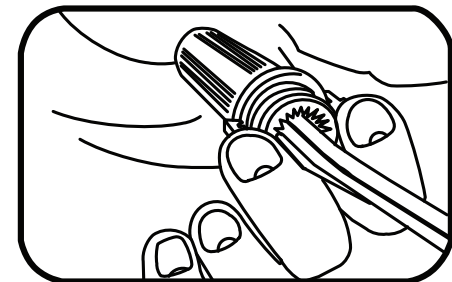

3. Close



When using both solid and stranded wire, wrap stranded wire around untwisted solid wire.



Special LV 9500 features - Bending sleeve for solid wires and round hole below "V" to accommodate large wire combinations.

PACKAGING QTYS.

PART	PACKAGE	CARTON	MIN. ORDER
LV 9000	24	720	720
LV 9500	12	432	432