

## M Type Nylon Gable Gland

**Thread spec.:** Metric


**Material:** Parts A,C,E are made of UL approved nylon PA66, parts B and D are made of Nitrile butadiene rubber(NBR)

**Working temperauture:** -40<sup>0</sup>C to 100<sup>0</sup>C in static state, instantaneous heat resistance up to 120<sup>0</sup>C;  
-20<sup>0</sup>C to 100<sup>0</sup>C in static state, instantanneou heat resistance up to 120<sup>0</sup>C; -20<sup>0</sup>C to 80<sup>0</sup>C in dynamic state, instantaneous heat resistance up to 100<sup>0</sup>C

**Characteristics:** Special design of clamping die and rubber part, large range in clamping cable, ultra-strong stretching , waterproof, dustproof, and high abilit to resist salt, acid, alkali, alcohol, grease and general solvent.

**IP rate:** IP68

**Color option:** Black ,light grey ,as ohter speical colors could be customized

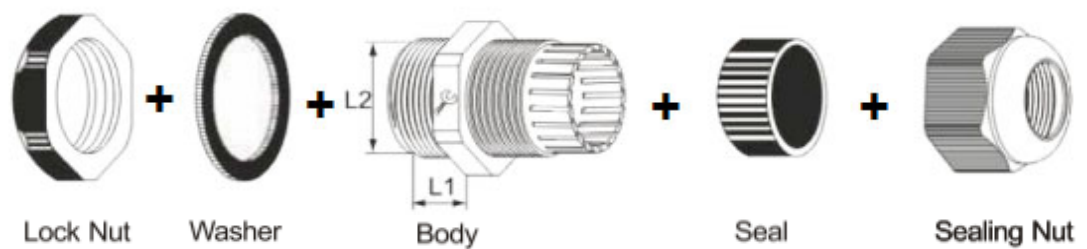

Model	Cable Range (mm)	Thread O.D. L2(mm)	Thread Length L1(mm)	Spanner Size (mm)
M8	2.5~4.5	8	8	13/12
M10	3~6	10	8	15/13
M12	3~6.5	12	9	18/16
M16	4~8	16	9	22/19
M18	5~10	18	9	24/22
M20	6~12	20	10	27/24
M22	10~13	22	10	30/27
M24	12~15	24	10	30/28
M25	13~18	25	11	31/28
M27	13~18	27	12	35/33
M28	13~18	28	12	35/33
M30	16~21	32	12	37/35
M32	16~21	32	12	38/35
M36	18~25	36	12	45/42
M40	22~32	40	15	52/52
M46	22~32	46	15	58/52
M50	32~38	50	18	62/58
M58	29~35	58	18	70/64
M63	37~44	63	18	72/64
M71	42~50	71	30	83/77