

PG Type Nylon Waterproof Gable Gland

Material:Parts A,C,E are made of UL approved nylon PA66,parts B and D are made of Nitrile butadiene rubber(NBR)


Working temperature:-40°C to100°C in static state,instantanneou heat resistance up to120°C;

-40°C to100°C in static state,instantanneou heat resistance up to120°C;-20°C to 80°C in dynamic state,

instantaneous heat resistance up to 100°C

IP rate: IP68

Color option: Black ,light grey ,as ohter speical colors could be customized

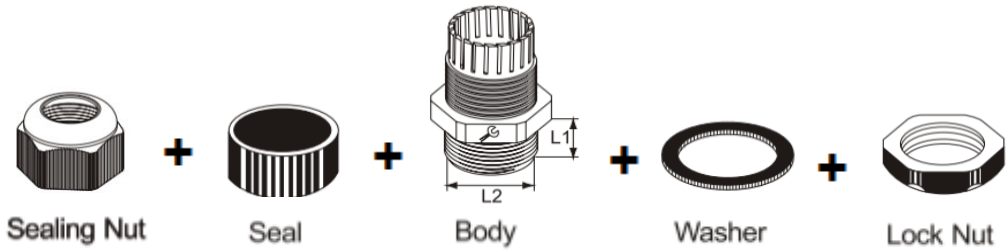

Model	Cable Range (mm)	Thread O.D. L2(mm)	Thread Length L1(mm)	Spanner Size (mm)
PG7	3~6.5	12.5	9	18/16
PG7	2~5	12.5	9	18/16
PG9	4~8	15.2	9	22/19
PG9	2~6	15.2	9	22/19
PG11	5~10	18.6	9	24/22
PG11	3~7	18.6	9	24/22
PG13.5	6~11	20.4	10	27/24
PG13.5	5~9	20.4	10	27/24
PG16	10~13	22.5	10	30/27
PG16	7~12	22.5	10	30/27
PG19	12~15	24	10	30/28
PG19	10~12	24	10	30/28
PG21	13~18	28.3	12	35/33
PG21	9~16	28.3	12	35/33
PG25	16~21	30	12	37/35
PG25	13~18	30	12	37/35
PG29	18~25	37	12	45/42
PG29	13~20	37	12	45/42
PG36	22~32	47	15	58/52
PG36	20~26	47	15	58/52
PG42	32~38	54	18	62/58
PG42	25~31	54	18	62/58
PG48	37~44	59.3	18	70/64

PG Type Nylon Waterproof Gable Gland

Material:Parts A,C,E are made of UL approved nylon PA66,parts B and D are made of Nitrile butadiene rubber(NBR)


Working temperauture:-40⁰C to100⁰C in static state,instantanneou heat resistance up to120⁰C;

-40⁰C to100⁰C in static state,instantanneou heat resistance up to120⁰C;-20⁰C to 80⁰C in dynamic state,

instantaneous heat resistance up to 100⁰C

IP rate: IP68

Color option: Black ,light grey ,as ohter speical colors could be customized

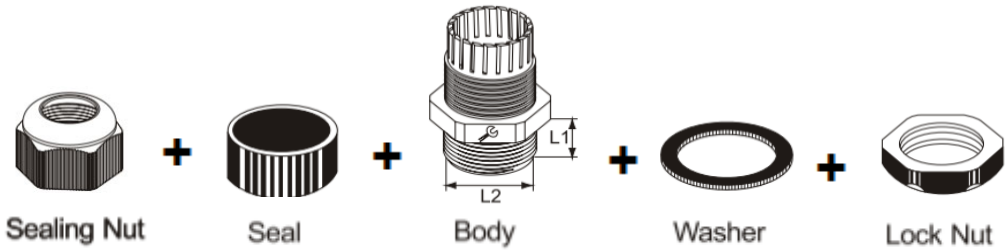

Model	Cable Range (mm)	Thread O.D. L2(mm)	Thread Length L1(mm)	Spanner Size (mm)
PG48	29~35	59.3	18	70/64
PG63	42~50	71	30	83/77
PG63	32~40	71	30	83/77