


Typical Application

EPPA 034 is a roll spring and is used to attach shielding braid to the tape shield of a plastic cable when terminating or jointing. The larger sizes are used for attaching earth braid to lead sheathed cables.

The roll spring is normally used as an integral part of Raychem Joints and Terminations.

Material: Specification DIN 1.4310 stainless spring steel.

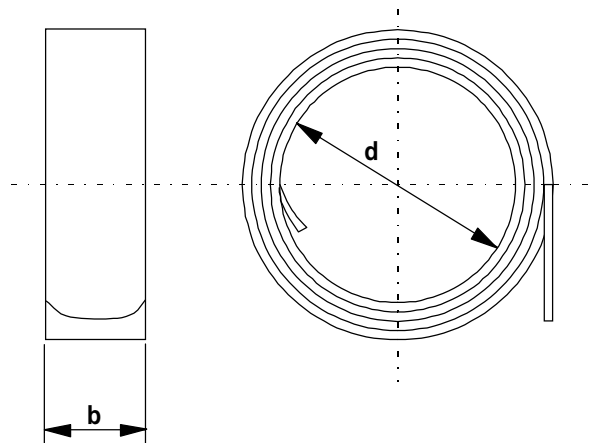

| Part-Number | Usage range | | b | d | Length |
|--------------|-------------|-----------|----|----|--------|
| | min mm | max mm | | | |
| EPPA 034 - A | 12 | 20 | 13 | 10 | 280 |
| EPPA 034 - B | 17 | 28 | 13 | 14 | 400 |
| EPPA 034 - C | 25 | 40 | 13 | 20 | 570 |
| EPPA 034 - D | 36 | 60 | 13 | 30 | 850 |
| EPPA 034 - E | 17 | 29 | 25 | 14 | 570 |
| EPPA 034 - F | 30 | 39 | 25 | 22 | 700 |
| EPPA 034 - G | 40 | 60 | 25 | 30 | 950 |
| EPPA 034 - H | 50 | 75 | 30 | 38 | 1100 |
| EPPA 034 - I | 50 | 75 | 30 | 38 | 1350 |
| EPPA 034 - K | 12 | 20 | 13 | 10 | 400 |
| EPPA 034 - L | 57 | 85 | 30 | 45 | 1350 |
| EPPA 034 - M | 33 | 45 | 25 | 25 | 850 |
| EPPA 034 - N | 25 | 34 | 25 | 19 | 650 |
| EPPA 034 - O | 85 | 110 | 30 | 70 | 1500 |

Printing and Packaging

Roll springs are printed with Month/Year manufactured and a letter identifying type and size