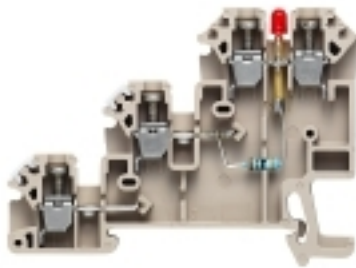


**W-Series**  
**DLI 2.5/LD-RT/NPN -+ DB**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 16  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
www.weidmueller.com

**Signal wiring**

Tailored and particularly compact: with our AIO initiator/actuator terminal blocks, you are relying on an application-optimised solution for signal wiring. We also offer you other terminal blocks featuring spring and screw connection technology for signal wiring.

**General ordering data**

Type	DLI 2.5/LD-RT/NPN -+ DB
Order No.	<a href="#">1783950000</a>
Version	W-Series, Initiator/actuator terminal, Rated cross-section: 2.5 mm <sup>2</sup> , Screw connection
GTIN (EAN)	4032248212590
Qty.	100 pc(s).

**W-Series**  
**DLI 2.5/LD-RT/NPN -+ DB**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Technical data**
**Dimensions and weights**

Width	6.1 mm	Width (inches)	0.24 inch
Height	66 mm	Height (inches)	2.598 inch
Depth	48.5 mm	Depth (inches)	1.909 inch
Depth including DIN rail	49 mm	Net weight	10.75 g

**Temperatures**

Continuous operating temp., min.	-50 °C	Continuous operating temp., max.	120 °C
----------------------------------	--------	----------------------------------	--------

**Material data**

Material	Wemid	Colour	Dark Beige
UL 94 flammability rating	V-0		

**System specifications**

Version	Screw connection, with LED, One end without connector	Tightening torque (clamping screw for copper conductors)	0.4...0.6 Nm
End cover plate required	Yes	Number of potentials	2
Number of levels	3	No. of clamping points per level	1
Number of potentials per tier	1	PE connection	No
Mounting rail	TS 35	N-function	No
PE function	No	PEN function	No

**Additional technical data**

Electronic component	red LED	Explosion-tested version	No
Number of similar terminals	1	Open sides	right
Type of mounting	Snap-on		

**CSA rating data**

Certificate No. (CSA)	12400-134	Current size B (CSA)	10 A
Current size C (CSA)	10 A	Current size D (CSA)	10 A
Voltage size B (CSA)	30 V	Voltage size C (CSA)	30 V
Voltage size D (CSA)	30 V	Wire cross section max. (CSA)	12 AWG
Wire cross section min. (CSA)	26 AWG		

**Conductors for clamping (additional connection)**

Conductor cross-section, flexible plus plastic collar DIN 46228/1, further connection, max.	2.5 mm <sup>2</sup>
---	---------------------

**W-Series**  
**DLI 2.5/LD-RT/NPN -+ DB**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Technical data**
**Conductors for clamping (rated connection)**

Blade size	0.6 x 3.5 mm	Clamping range, rated connection, max.	4 mm <sup>2</sup>
Clamping range, rated connection, min.	0.13 mm <sup>2</sup>	Clamping screw	M 2.5
Connection direction	on side	Gauge to IEC 60947-1	A3
Number of connections	4	Stripping length	7 mm
Tightening torque, max.	0.6 Nm	Tightening torque, min.	0.4 Nm
Torque level with DMS electric screwdriver	1	Type of connection	Screw connection
Wire connection cross section AWG, max.	AWG 12	Wire connection cross section AWG, min.	AWG 26
Wire connection cross section, finely stranded with wire-end ferrules DIN 46228/1, rated connection, max.	2.5 mm <sup>2</sup>	Wire connection cross section, finely stranded with wire-end ferrules DIN 46228/1, rated connection, min.	0.5 mm <sup>2</sup>
Wire connection cross section, finely stranded, max.	4 mm <sup>2</sup>	Wire connection cross section, solid core max. rated connection	4 mm <sup>2</sup>
Wire connection cross section, solid core, min. rated connection	0.5 mm <sup>2</sup>	Wire connection cross section, stranded, rated connection, max.	4 mm <sup>2</sup>
Wire connection cross section, stranded, rated connection, min.	1.5 mm <sup>2</sup>	Wire connection cross-section, finely stranded, min.	0.5 mm <sup>2</sup>

**Display element**

Current	5 mA	Operating voltage for display, max.	30 V
Operating voltage for display, min.	5 V	Type of voltage for indicator	DC

**PE rating data**

PEN function	No
--------------	----

**Rating data**

Rated cross-section	2.5 mm <sup>2</sup>	Rated voltage	30 V
Rated current	24 A	Current at maximum wires	24 A
Standards	IEC 60947-7-1	Volume resistance according to IEC 60947-7-x	1.33 mΩ
Rated impulse withstand voltage	0.8 kV	Pollution severity	3

**UL rating data**

Certificate No. (UR)	E60693	Conductor size Factory wiring max. (UR)	12 AWG
Conductor size Factory wiring min. (UR)	26 AWG	Conductor size Field wiring max. (UR)	12 AWG
Conductor size Field wiring min. (UR)	22 AWG		

**Classifications**

ETIM 3.0	EC000900	ETIM 4.0	EC000900
ETIM 5.0	EC000900	ETIM 6.0	EC000900
UNSPSC	30-21-18-11	eClass 5.1	27-14-11-28
eClass 6.2	27-14-11-28	eClass 7.1	27-14-11-28
eClass 8.1	27-14-11-28	eClass 9.0	27-14-11-28
eClass 9.1	27-14-11-28		

**Data sheet****W-Series**  
**DLI 2.5/LD-RT/NPN -+ DB****Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 16  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
www.weidmueller.com**Technical data****Approvals**

Approvals



ROHS

Conform

**Downloads**Approval/Certificate/Document of  
Conformity[DE\\_PT1004\\_20160418\\_163\\_ISSUE01.pdf](#)

Brochure/Catalogue

[CAT 1 TERM 16/17 EN](#)

Engineering Data

[EPLAN, WSCAD](#)**Safety note**

Safety notice

[Safety Information](#)